

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 818 753 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
14.01.1998 Bulletin 1998/03

(51) Int Cl.⁶: G06T 9/20

(21) Application number: 97305052.9

(22) Date of filing: 09.07.1997

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE

(72) Inventor: Jeon, Byeung-Woo
Sungnam-city, Kyungki-do (KR)

(30) Priority: 09.07.1996 KR 9627676

(74) Representative: Chugg, David John
Appleyard Lees,
15 Clare Road
Halifax, West Yorkshire HX1 2HY (GB)


(71) Applicant: Samsung Electronics Co., Ltd.
Suwon City, Kyungki-do (KR)

(54) Contour decoding apparatus

(57) A contour decoding apparatus decodes a bitstream of contour information encoded using a chain code. A demultiplexing unit (21) separates the bitstream of the contour information into start contour pixel information and chain code information. A start contour pixel decoder (22) decodes start contour pixel information separated by the demultiplexing unit and outputs horizontal and vertical coordinate values of the start pixel. A chain code decoding means (23-27, SW1-SW3) stores horizontal and vertical coordinate values of previous contour pixel, selects an incremental and decremental value designated by the chain code information output from the demultiplexing unit, calculates coordinate

values of a next contour pixel using the selected incremental and decremental value and the coordinate values decoded by the start contour pixel decoder (22) or stored previous coordinates values decoded by the start contour pixel decoder (22) or stored previous coordinates values, and calculates coordinate values of the next contour pixel using the coordinate values of the previous contour pixel and the incremental and decremental value designated by the chain code information. A contour pixel representation unit (28) represents values representing a contour pixel on a pixel position designated by the coordinate values decoded by the start contour pixel decoder (22) and the chain code decoding unit (23-27, SW1-SW3).

FIG. 2

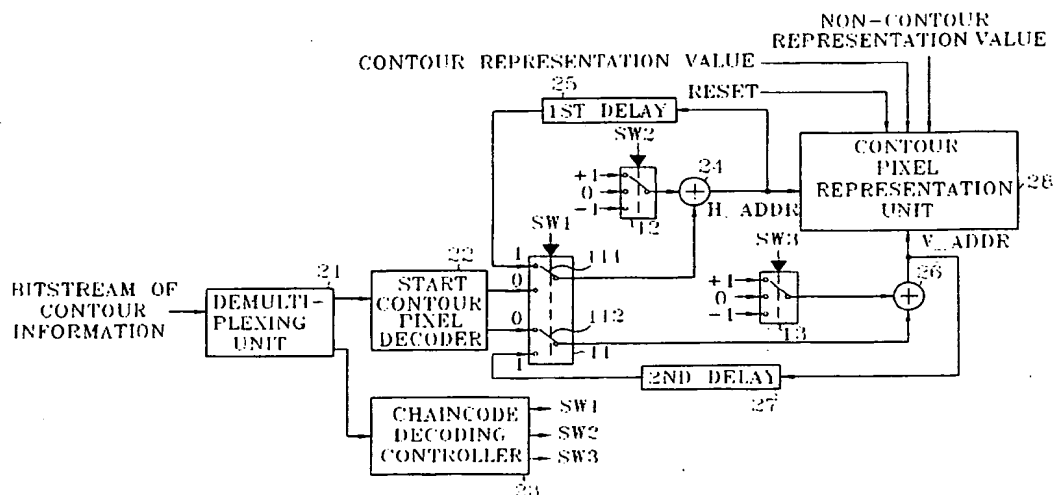

Description

The present invention relates to a contour decoding apparatus for decoding contour information encoded by a chain code.

A great amount of research and development effort is being made for a digital video and audio service. Particularly a bidirectional multimedia service via a communication channel is under active development. A digital video service via a bandwidth-limited communication channel requires a high compression rate. By the way, it is difficult to obtain such a high compression rate using a block-based motion compensation and transformation coding method such as existing MPEG (Motion Picture Experts Group)-1 and MPEG-2. Since the encoding method in the existing MPEG-1 and MPEG-2 is based on a block structure of images, it is not easy to perform a flexible and independent encoding of each object or region according to a required compression rate. Thus, it is needed that a given image is divided into objects each of which can be processed independently. An independent encoding of each region or object, called "object-based encoding", requires description of object shape. The shape information is transmitted to a decoder as contour information.

A chain coding method is known as a general lossless contour information encoding method. The chain coding method represents the contour using the eight direction vectors as shown in Figure 1A. First, the chain coding method selects a location of a starting contour pixel to start scanning the contour form. Contour pixel is a pixel constituting the contour. A chain-coding example is shown in Figure 1B. In the case of a start pixel which starts a chain coding, horizontal and vertical coordinate values of the start pixel should be transmitted. By the way, since the coordinate values of the start pixel occupy a relatively high ratio of transmission amount in case of a medium requiring a low transmission rate, an additional compression is required. Thus, the horizontal and vertical coordinate values of the start pixel are variable-length-coded and transmitted, or any one of the horizontal and vertical coordinate values of the start pixel is independently variable-length-coded and a difference value between the other coordinate value and the independently variable-length-coded coordinate value is variable-length-coded and transmitted.

Therefore, it is important to have an efficient decoding apparatus to decode the compressed starting location and chain codes.

It is an aim of preferred embodiments of the present invention to provide a contour decoding apparatus for receiving and decoding object contour information of an image which is encoded using a chain code.

According to a first aspect of the present invention, there is provided an apparatus for decoding an object contour from a bitstream of contour information encoded using a chain code, the contour decoding apparatus comprising: demultiplexing means for separating the bit-

stream of the contour information into start contour pixel information and chain code information; a start contour pixel decoder for decoding start contour pixel information separated by the demultiplexing means and outputting horizontal and vertical coordinate values of the start pixel; a chain code decoding unit for storing incremental and decremental values possessed by adjacent pixels in the horizontal or vertical directions therein, selecting an incremental and decremental value designated by the chain code information output from the demultiplexing unit, calculating coordinate values of a next contour pixel using the selected incremental and decremental value and the coordinate values decoded by the start contour pixel decoder, and calculating coordinate values of the next contour pixel using the coordinate values of the previous contour pixel and the incremental and decremental value designated by the chain code information; and a contour pixel representation unit for representing a value representing a contour pixel on a pixel position designated by the coordinate values decoded by the start contour pixel decoder and the chain code decoding unit.

According to a second aspect of the invention, there is provided an apparatus for decoding an object contour from a bitstream of contour information encoded using a chain code, the contour decoding apparatus comprising:

a demultiplexing means for separating the bitstream of the contour information into start contour pixel information and chain code information;

a start contour pixel decoder for decoding start contour pixel information separated by the demultiplexing means and outputting horizontal and vertical coordinate values of the start pixel; and

a chain code decoding means for storing horizontal and vertical coordinate values of a previous contour pixel, selecting an incremental and decremental value as indicated by the chain code information output from the demultiplexing means, calculating coordinate values of a next contour pixel using said selected incremental and decremental values and said stored coordinate values, and outputting horizontal and vertical coordinates at which a contour pixel is located.

The apparatus preferably further comprises a contour pixel representation for displaying a value representing a contour pixel on a pixel represented by the coordinate values decoded by the start contour pixel decoder and the chain code decoding means, said start contour pixel decoder comprises, a demultiplexer for separating the start contour pixel information into horizontal and vertical coordinate values; a first variable-length-decoder for variable-length-decoding the horizontal coordinate value separated by the demultiplexer

and outputting the result; and a second variable-length-decoder for variable-length-decoding the vertical coordinate value separated by the demultiplexer and outputting the result.

Preferably, said start contour pixel decoder comprises: a demultiplexer for separating the start contour pixel information into a reference value and a difference value from the reference value; a first variable-length-decoder for variable-length-decoding the reference value separated by the demultiplexer and outputting the result; a second variable-length-decoder for variable-length-decoding the difference value separated by the demultiplexer and outputting the result; and an adder for adding the outputs from said first and second variable-length-decoders and outputting the added result as a coordinate value of the other.

Said reference coordinate value may be a horizontal coordinate value.

Said reference coordinate value may be is a vertical coordinate value.

Said chain code decoding means preferably stores the incremental and decremental values in a form of a lookup table.

Said chain code decoding means may comprise: a first switch for selecting between the horizontal and the vertical coordinate values of a previous contour pixel and those of starting contour pixel and for outputting selected coordinates values; a first delay for delaying the horizontal coordinate value of a previous contour pixel; a second switch for selecting one of values representing horizontal position adjustment such as a prior-to-one-pixel position (-1), a current pixel position (0) and an after-one-pixel position (+1) according to the selected incremental and decremental value; a first adder for adding the horizontal coordinate value output from said first switch and the value selected by said second switch; a second delay for delaying the vertical coordinate value of the previous contour pixel; a third switch for selecting one of values representing vertical position adjustment such as a prior-to-one-line position (-1), a current line position (0) and an after-one-line position (+1) according to the selected incremental and decremental value; and a second adder for adding the vertical coordinate value output from said first switch and the value selected by said third switch.

Preferably, said second and third switches in the chain code decoding means select "0" when the coordinates of start contour pixel is supplied to said first and second adders.

For a better understanding of the invention, and to show how embodiments of the same may be carried into effect, reference will now be made, by way of example, to the accompanying diagrammatic drawings, in which:

Figure 1A is a view showing eight direction vectors used for a chain coding;

Figure 1B is a view showing an example for explain-

ing contour pixels and chain coding;

Figure 2 is a block diagram of a contour decoding apparatus according to a preferred embodiment of the present invention;

Figure 3 is a detailed block diagram of the start contour pixel decoder of Figure 2;

Figure 4 is a table diagram showing switching control signals for controlling connecting states of the switches in figure 2; and

Figure 5 is a detailed diagram of the chain code decoding controller of Figure 2.

A preferred embodiment of the present invention will be described in detail with reference to the accompanying drawings.

In figure 2 showing a contour decoding apparatus according to a preferred embodiment of the present invention, a demultiplexing unit 21 receives a bitstream of the contour information encoded using a chain code. The demultiplexing unit 21 separates the received bitstream into the start contour pixel information and the chain code information and outputs the separated start contour pixel information and chain code information to a start contour pixel decoder 22 and a chain code decoding controller 23, respectively. The start contour pixel decoder 22 receives the start contour pixel information output from the demultiplexing unit 21 and decodes the received start contour pixel information.

Figure 3 is a detailed diagram of the start contour pixel decoder 22 shown in Figure 2. One of horizontal and vertical coordinate values of the contour pixel where a chain coding starts is variable-length-coded as a reference coordinate value and a difference value between the other coordinate value and the reference coordinate value is variable length-coded and transmitted. Figure 3 shows an example of a case that a horizontal coordinate value is variable-length-coded into a reference coordinate value.

In Figure 3, a demultiplexer 31 separates the received start contour pixel information into a reference coordinate value and a difference value. A first variable-length-decoder 32 receives and variable-length-decodes the reference coordinate value separated by the demultiplexer 31. A second variable-length-decoder 33 receives and variable-length-decodes a variable-length-coded coordinate difference of the other coordinate and the reference coordinate values. The coordinate value variable-length-decoded by the second variable-length-decoder 33 is added to the decoded reference coordinate value by an adder 34. As a result, a decoded vertical coordinate value is output by the adder 34. Referring back to Figure 2, the horizontal coordinate value decoded by the first variable-length-decoder 32 and the vertical coordinate value output from the adder

34 are applied to fixed contacts "0" of first and second switching elements 111 and 112 in a first switch 11, respectively.

During the time when the start contour pixel information is decoded, moving contacts of switches 11 through 13 are connected to the fixed contacts "0" according to switching control signals SW1 through SW3 supplied from the chain code decoding controller 23, which will be described below.

The decoded horizontal coordinate value is applied to a contour pixel representation unit 28 via the switching element 111 of the first switch 11 and an adder 24, and the decoded vertical coordinate value is applied to the contour pixel representation unit 28 via the switching element 112 of the first switch 11 and adder 26. The contour pixel representation unit 28 represents the contour pixels in a frame memory (not shown). The contour pixel representation unit 28 initializes each pixel value in the frame memory by an externally input reset signal prior to decoding the contour information, as a non-contour display value. Thereafter, when the horizontal and vertical coordinate values are applied from the adders 24 and 26, the contour pixel value is represented at the pixel position designated by the applied horizontal and vertical coordinate values.

When a decoding of the start contour pixel information completes, the chain code information decoding starts by the chain code decoding controller 23. In more detail, the coordinate values of the next contour pixels following the starting contour pixel represented by the coordinate values decoded by the start contour pixel decoder 22 are calculated in turn.

The chain code information, that is, whether to which direction a current contour pixel is positioned from a previous contour pixel, is determined by the horizontal and vertical codes indicated by each direction vector shown in Figure 1A. The chain code decoding controller 23 stores the horizontal and vertical codes of each direction vector in the form of a lookup table.

Figure 4 shows a lookup table containing the horizontal and vertical codes of each direction vector of Figure 1A. The lookup table of Figure 4 stores status values of control signals SW1, SW2 and SW3. SW1 is for controlling supply of the coordinates of contour pixels. SW2 and SW3 are for controlling calculations of H_ADDR and V_ADDR according to each direction vector.

Referring to Figure 5 showing a detailed structure of the chain code decoding controller 23 of Figure 2, the chain code information separated by the demultiplexing unit 21 is added to an address ADDR0+1 by an adder 51. The added result of the adder 51 is used as a read address for the switching control signals SW1 through SW3 stored in the lookup table 52. When the start contour pixel information is decoded, the output of the adder 51 is not used, and instead switching control signals SW1 of "0", SW2 of "0" and SW3 of "0" designated by the address ADDR0 are output. In other case, the switching control signals SW1 through SW3 output from

the lookup table 52 are supplied to the first through third switches 11 through 13, which are used for controlling the connecting states of the respective switches 11 through 13.

The horizontal and vertical coordinate values of the decoded start pixel are input to first and second delays 25 and 27, respectively. The horizontal and vertical coordinate values of the start contour pixel are delayed by the first and second delays 25 and 27 during the time when the chain code decoding controller 23 operates with respect to the next chain code information. During the time when the chain code information is decoded, the moving contacts of the switching elements 111 and 112 in the first switch 11 are connected to the fixed contacts "1" according to the first switching control signal SW1 supplied from the chain code decoding controller 23. Thus, the coordinate values delayed by the delays 25 and 27 are fed back to the adders 24 and 26 via the switching elements 111 and 112 in the first switch 11, respectively.

The second switch 12 selects one of horizontal positions such as a prior-to-one-pixel position (-1), a current pixel position (0) and an after-one-pixel position (+1) according to the second switching signal SW2 output from the chain code decoding controller 23, to select where the horizontal coordinate value of a contour pixel is positioned from the horizontal coordinate value of the previous contour pixel. The first adder 24 adds the horizontal coordinate value of the fed-back previous contour pixel and the value selected via the second switch 12, and outputs the added result as the horizontal coordinate value H_ADDR of the current contour pixel.

The third switch 13 selects one of vertical positions such as a prior-to-one-line position (-1), a current line position (0) and an after-one-line position (+1) according to the third switching signal SW3 output from the chain code decoding controller 23, to select where the vertical coordinate value of a contour pixel is positioned from the vertical coordinate value of the previous contour pixel. The second adder 26 adds the vertical coordinate value of the fed-back previous contour pixel and the value selected via the third switch 13, and outputs the added result as the vertical coordinate value V_ADDR of the current contour pixel. The horizontal and vertical coordinate values output from the adders 24 and 26 are applied to the contour pixel display 28 and simultaneously input to the delays 25 and 27 so as to be used for calculating the next contour pixel.

If the horizontal and vertical coordinate values H_ADDR and V_ADDR are input from the adders 24 and 26, the contour pixel display 28 displays the contour pixel value at a pixel position represented by the input horizontal and vertical coordinate values.

The start contour pixel decoder 22 has been described with respect to only the case of decoding coordinate values encoded with a difference between the reference coordinate value and one of the horizontal and vertical coordinate values. It is however obvious

that a case that the coordinate values are individually variable-length-coded can be implemented within the scope of the present invention.

As described above, the contour decoding apparatus can effectively decode contour information encoded with a chain code.

While only certain embodiments of the invention have been specifically described herein, it will be apparent that numerous modifications may be made thereto without departing from the scope of the invention. One example is to use differential chain coding instead of the chain coding.

The reader's attention is directed to all papers and documents which are filed concurrently with or previous to this specification in connection with this application and which are open to public inspection with this specification, and the contents of all such papers and documents are incorporated herein by reference.

All of the features disclosed in this specification (including any accompanying claims, abstract and drawings), and/or all of the steps of any method or process so disclosed, may be combined in any combination, except combinations where at least some of such features and/or steps are mutually exclusive.

Each feature disclosed in this specification (including any accompanying claims, abstract and drawings), may be replaced by alternative features serving the same, equivalent or similar purpose, unless expressly stated otherwise. Thus, unless expressly stated otherwise, each feature disclosed is one example only of a generic series of equivalent or similar features.

The invention is not restricted to the details of the foregoing embodiment(s). The invention extends to any novel one, or any novel combination, of the features disclosed in this specification (including any accompanying claims, abstract and drawings), or to any novel one, or any novel combination, of the steps of any method or process so disclosed.

Claims

1. An apparatus for decoding an object contour from a bitstream of contour information encoded using a chain code, the contour decoding apparatus comprising:
 - a demultiplexing means (21) for separating the bitstream of the contour information into start contour pixel information and chain code information;
 - a start contour pixel decoder (22) for decoding start contour pixel information separated by the demultiplexing means (21) and outputting horizontal and vertical coordinate values of the start pixel; and

a chain code decoding means (23-27, SW1-SW3) for storing horizontal and vertical coordinate values of a previous contour pixel, selecting an incremental and decremental value as indicated by the chain code information output from the demultiplexing means (21), calculating coordinate values of a next contour pixel using said selected incremental and decremental values and said stored coordinate values, and outputting horizontal and vertical coordinates at which a contour pixel is located.

2. An apparatus for decoding an object contour from a bitstream of contour information encoded using a chain code according to claim 1, further comprises:

a contour pixel representation unit (28) for displaying a value representing a contour pixel on a pixel represented by the coordinate values decoded by the start contour pixel decoder (22) and the chain code decoding means,

said start contour pixel decoder (22) comprises,

a demultiplexer (31) for separating the start contour pixel information into horizontal and vertical coordinate values;

a first variable-length-decoder (32) for variable-length-decoding the horizontal coordinate value separated by the demultiplexer and outputting the result; and

a second variable-length-decoder (33) for variable-length-decoding the vertical coordinate value separated by the demultiplexer and outputting the result.

3. A contour decoding apparatus according to claim 1, wherein said start contour pixel decoder (22) comprises:

a demultiplexer (31) for separating the start contour pixel information into a reference value and a difference value from the reference value;

a first variable-length-decoder (32) for variable-length-decoding the reference value separated by the demultiplexer (31) and outputting the result;

a second variable-length-decoder (33) for variable-length-decoding the difference value separated by the demultiplexer and outputting the result; and

an adder (34) for adding the outputs from said

first and second variable-length-decoders (32,33) and outputting the added result as a coordinate value of the other.

7, wherein said second and third switches (SW3, SW3) in the chain code decoding means select "0" when the coordinates of start contour pixel is supplied to said first and second adders (24, 26).

4. The contour decoding apparatus according to claim 3, wherein said reference coordinate value is a horizontal coordinate value. 5
5. The contour decoding apparatus according to claim 3, wherein said reference coordinate value is a vertical coordinate value. 10
6. The contour decoding apparatus according to any of claims 1 to 5, wherein said chain code decoding means (23-27, SW1-SW3) stores the incremental and decremental values in a form of a lookup table. 15
7. The contour decoding apparatus according to any of claims 1 to 5, wherein said chain code decoding means comprises: 20
 - a first switch (SW1) for selecting between the horizontal and the vertical coordinate values of a previous contour pixel and those of starting contour pixel and for outputting selected coordinates values; 25
 - a first delay (25) for delaying the horizontal coordinate value of a previous contour pixel; 30
 - a second switch (SW2) for selecting one of values representing horizontal position adjustment such as a prior-to-one-pixel position (-1), a current pixel position (0) and an after-one-pixel position (+1) according to the selected incremental and decremental value; 35
 - a first adder (24) for adding the horizontal coordinate value output from said first switch (SW1) and the value selected by said second switch (SW2); 40
 - a second delay (27) for delaying the vertical coordinate value of the previous contour pixel; 45
 - a third switch (SW3) for selecting one of values representing vertical position adjustment such as a prior-to-one-line position (-1), a current line position (0) and an after-one-line position (+1) according to the selected incremental and decremental value; and 50
 - a second adder (26) for adding the vertical coordinate value output from said first switch (SW1) and the value selected by said third switch (SW3). 55
8. The contour decoding apparatus according to claim

FIG. 1 A

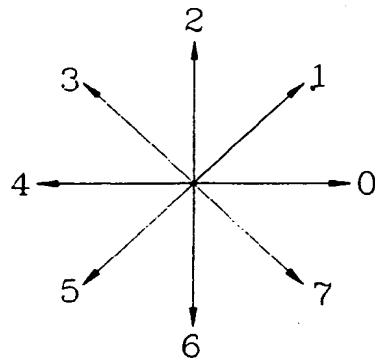


FIG. 1 B

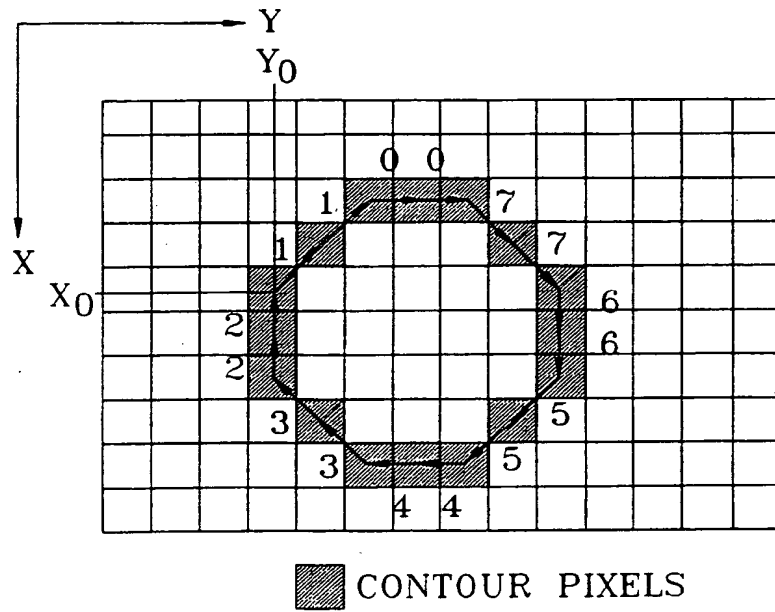


FIG. 2

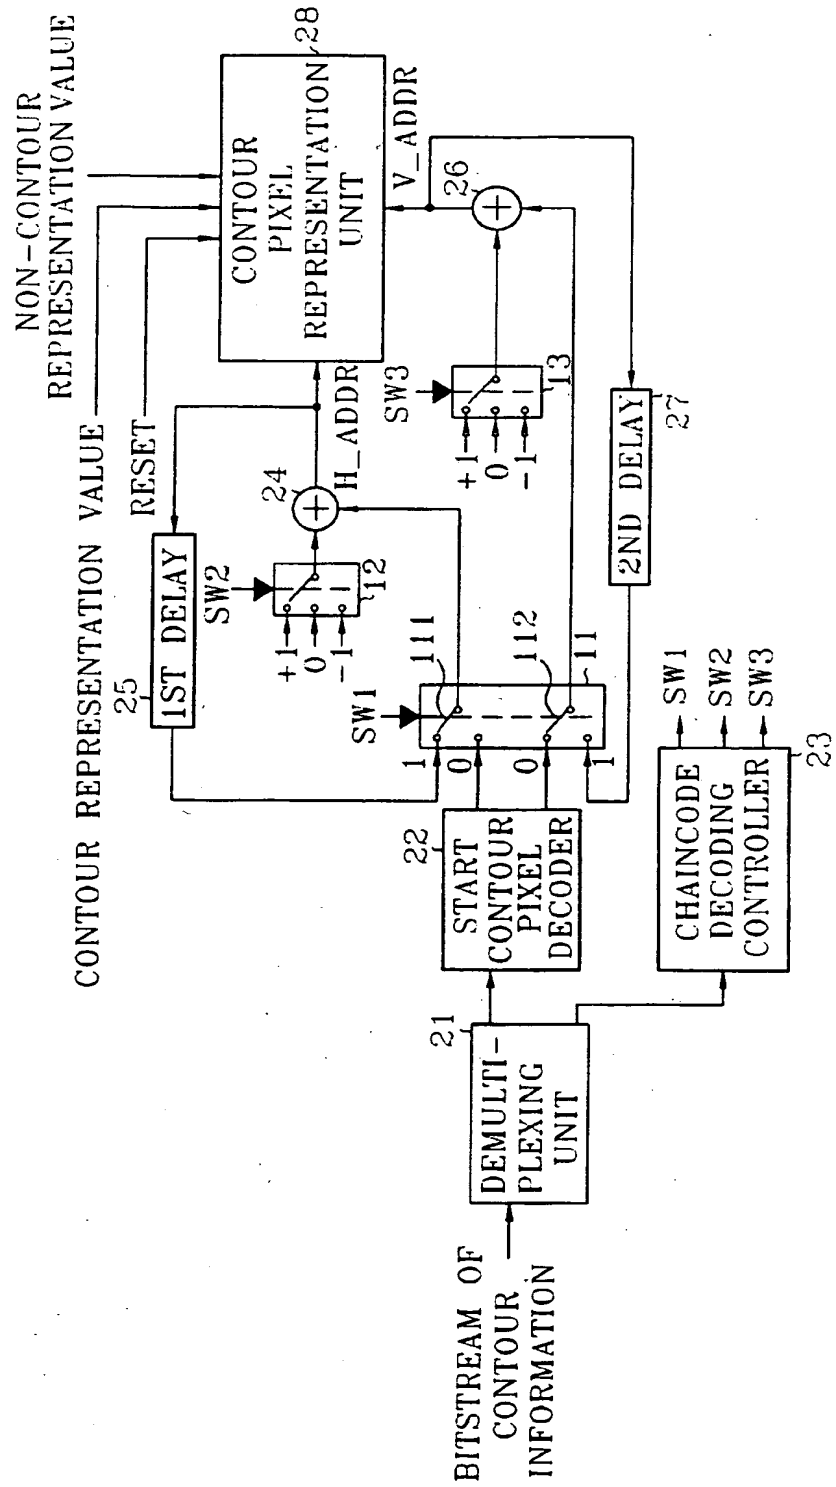


FIG. 3


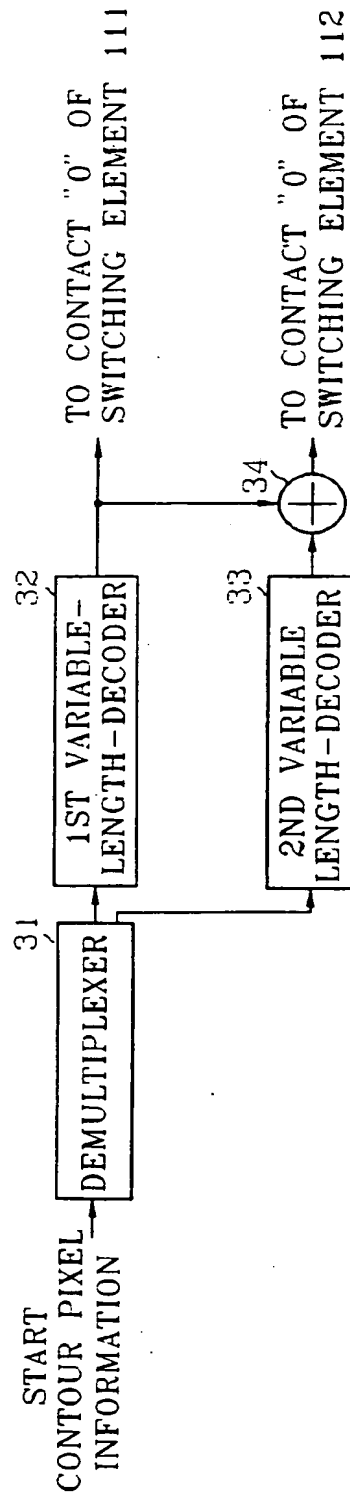


FIG. 4

CHAIN CODE	SW1	SW2	SW3
START CONTOUR PIXEL	0	0	0
0	1	1	0
1	1	1	-1
2	1	0	-1
3	1	-1	-1
4	1	-1	0
5	1	-1	1
6	1	0	1
7	1	1	1

FIG. 5



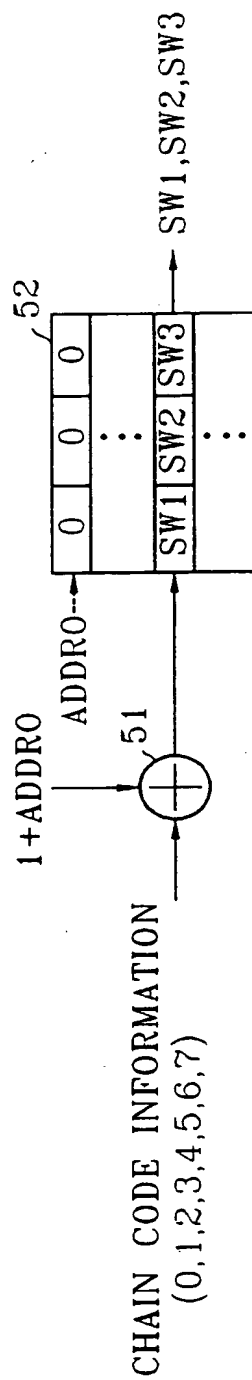

EP 0 818 753 A3

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:

30.06.1999 Bulletin 1999/26

(51) Int Cl.⁶: **G06T 9/20**

(43) Date of publication A2:

14.01.1998 Bulletin 1998/03

(21) Application number: 97305052.9

(22) Date of filing: 09.07.1997

(84) Designated Contracting States:

AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE

(30) Priority: 09.07.1996 KR 9627676

(71) Applicant: **Samsung Electronics Co., Ltd.**

Suwon City, Kyungki-do (KR)

(72) Inventor: **Jeon, Byeung-Woo**

Sungnam-city, Kyungki-do (KR)

(74) Representative: **Chugg, David John**

Appleyard Lees,

15 Clare Road


Halifax, West Yorkshire HX1 2HY (GB)

(54) **Contour decoding apparatus**

(57) A contour decoding apparatus decodes a bitstream of contour information encoded using a chain code. A demultiplexing unit (21) separates the bitstream of the contour information into start contour pixel information and chain code information. A start contour pixel decoder (22) decodes start contour pixel information separated by the demultiplexing unit and outputs horizontal and vertical coordinate values of the start pixel. A chain code decoding means (23-27, SW1-SW3) stores horizontal and vertical coordinate values of previous contour pixel, selects an incremental and decremental value designated by the chain code information output from the demultiplexing unit, calculates coordi-

nate values of a next contour pixel using the selected incremental and decremental value and the coordinate values decoded by the start contour pixel decoder (22) or stored previous coordinates values decoded by the start contour pixel decoder (22) or stored previous coordinates values, and calculates coordinate values of the next contour pixel using the coordinate values of the previous contour pixel and the incremental and decremental value designated by the chain code information. A contour pixel representation unit (28) represents values representing a contour pixel on a pixel position designated by the coordinate values decoded by the start contour pixel decoder (22) and the chain code decoding unit (23-27, SW1-SW3).

FIG. 2

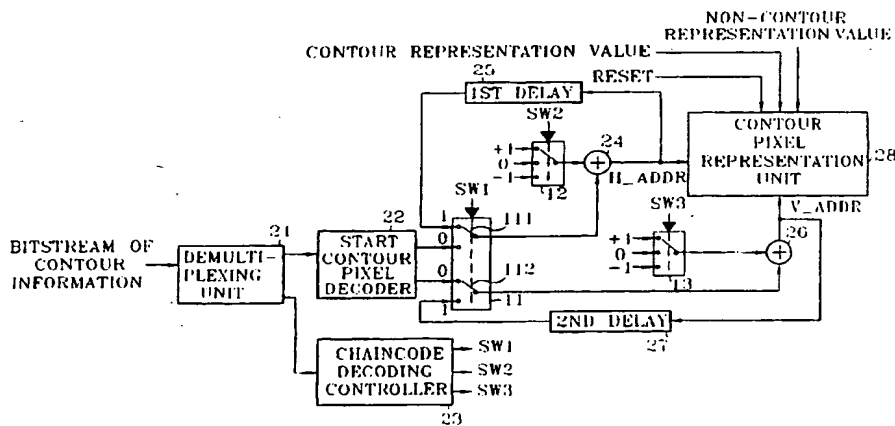



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 30 5052

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	EP 0 682 455 A (SONY CORP) 15 November 1995 * page 5, column 1 - page 6, column 1 * * claim 9; figures 1,2 * ---	1,2,5-7	G06T9/20
A	EP 0 675 460 A (MATSUSHITA ELECTRIC IND CO LTD) 4 October 1995 * page 2 - page 3; claim 5 * ---	1-3,6	
A	US 5 757 972 A (MURAYAMA JUN) 26 May 1998 * the whole document * -& AU 20466 95 A (CANON KK) 14 December 1995 ---	1,2,4,5	
A	EP 0 574 251 A (CANON KK) 15 December 1993 * abstract; figures 10,11 * -----	3	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			G06T
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 9 April 1999	Examiner Diallo, B
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1500 03 02 (P/Cat)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 97 30 5052

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-04-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0682455 A	15-11-1995	JP 7306943 A	21-11-1995
EP 0675460 A	04-10-1995	US 5577134 A	19-11-1996
		JP 7320067 A	08-12-1995
US 5757972 A	26-05-1998	JP 7334686 A	22-12-1995
		AU 2046695 A	14-12-1995
		CN 1115546 A	24-01-1996
EP 0574251 A	15-12-1993	JP 5342340 A	24-12-1993
		JP 6004658 A	14-01-1994
		JP 6052304 A	25-02-1994
		US 5757961 A	26-05-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82